

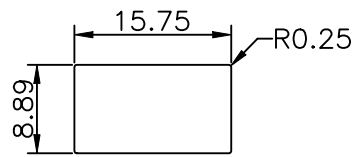



P.C.MOUNTING



PANEL MOUNTING



SPECIFICATIONS

MECHANICAL LIFE: 30,000 make-and-break cycles.
 CONTACT RESISTANCE: 20 mΩ max. initial @ 2-4VDC
 100mA for both silver and gold plated contacts.
 INSULATION RESISTANCE: 1,000 MΩ min.
 DIELECTRIC STRENGTH: 1,000 Vrms min.@sea level.
 OPERATING TEMPERATURE: -30°C to 85°C.

SWITCH FUNCTION			
Model No.	POS.1	POS.2	POS.3
ON/OFF	ON	NONE	ON
Term. Comm.	2-3	N/A	2-1
SCHEMATIC			

福哥興業股份有限公司 FAVOR UNION CO., LTD.

台灣新北市新莊區大安路20號

NO. 20 TA AN RD. HSIN CHUANG
 NEW TAIPEI CITY TAIWAN R. O. C

TEL 886-2-2202-8766

FAX 886-2-2204-3500

比例 SCALE		品名 TITLE		ROCKER SWITCH SERIES	
單位 DIMENSION mm		型號 MODEL		FSX08-1-2-H01-DE	
DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE		繪圖 DRAWN		核准 APPROVED	
UP TO 10 ±0.3		許麒弘		黃威翔	
ABOVE 10 TO 100 ±0.5		DRAWN		A	
ABOVE 100 ±0.8		圖樣		版次 REVISION	
ANGULAR DIMENSIONS 5°				日期 DATE	
				2019/8/7	