

**SPECIFICATIONS**

MECHANICAL LIFE: 50,000 make-and-break cycles.  
 CONTACT RESISTANCE: 20 mΩ max. initial @ 2-4VDC  
 100mA for both silver and gold plated contacts.  
 INSULATION RESISTANCE: 1,000 MΩ min.  
 DIELECTRIC STRENGTH: 1,000 Vrms min.@sea level.  
 OPERATING TEMPERATURE: -30°C to 85°C.

SWITCH FUNCTION		
Model No.	POS.1	POS.2
ON/OFF	ON	ON
Term. Comm.	1-2	2-3
SCHEMATIC		

福哥興業股份有限公司 FAVOR UNION CO., LTD.

台灣新北市新莊區大安路20號


NO. 20 TA AN RD. HSIN CHUANG  
 NEW TAIPEI CITY TAIWAN R. O. C

TEL 886-2-2202-8766


FAX 886-2-2204-3500

比例 SCALE	單位 DIMENSION mm
DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE	
UP TO 10	±0.3
ABOVE 10 TO 100	±0.5
ABOVE 100	±0.8
ANGULAR DIMENSIONS	5 °


品名 TITLE	PUSH SWITCH SERIES			
型號 MODEL	FSZX13-1-2-101-DE			
繪圖 DRAWN	許麒弘	核准 APPROVED	黃威翔	
	版次 REVISION	A	日期 DATE	2019/8/16

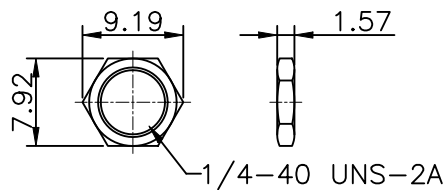

1/4 INCH NUTS

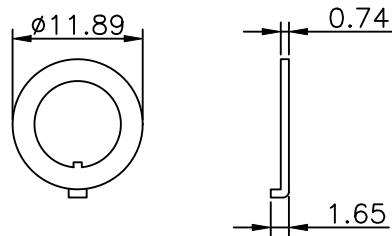

LOCKING RING

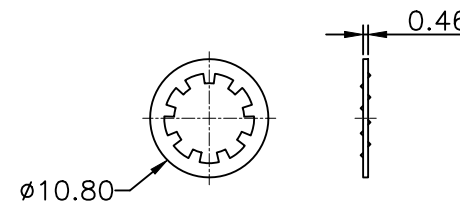

LOCKING WASHER

	PART NAME	MATERIAL	DISPOSAL	Q'TY
1	1/4 INCH NUTS	BRASS	Nickel plating	2
2	LOCKING RING	SPCC	Nickel plating	1
3	LOCKING WASHER	SUS	Lustration	1

福哥興業股份有限公司 FAVOR UNION CO., LTD.

台灣新北市新莊區大安路20號

NO. 20 TA AN RD. HSIN CHUANG  
NEW TAIPEI CITY TAIWAN R. O. C

TEL 886-2-2202-8766

FAX 886-2-2204-3500

比例 SCALE		品名 TITLE		HARDWARE	
單位 DIMENSION mm		型號 MODEL		1/4 INCH NUTS/LOCKING RING/LOCKING WASHER	
DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE		繪圖 DRAWN		核准 APPROVED	
UP TO 10	±0.3	許麒弘		黃威翔	
ABOVE 10 TO 100	±0.5	版次 REVISION		日期 DATE	
ABOVE 100	±0.8	A		2019/8/16	
ANGULAR DIMENSIONS	5 °				